


3.14 PRIMAFLEX UNI H400 & H600

Temperature range -85 °C to 400 °C / 600 °C

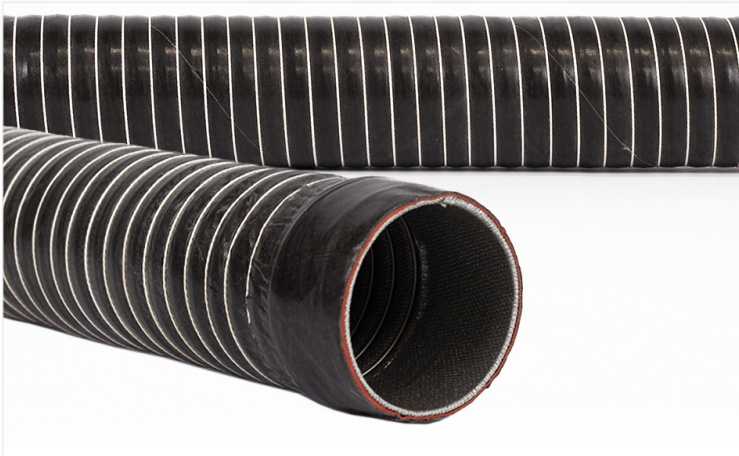

Description

Durable, flexible high-temperature spiral hose made of multiple-ply heat-resistant technical textile fabric with internal spring steel spiral and thermoplastic outer layer. A finely crafted, vulcanized specialist product of high quality using high-grade raw materials. Highly suitable for conveying very hot and very cold air, cold and hot gases as well as vapors.

Properties

- H400: -85 °C to +400 °C
- H600: -85 °C to +600 °C
- Multiple-ply
- Gastight
- Flexible
- Smooth interior
- Superior insulation
- Durable
- High tensile strength
- Non-kinking
- Good vacuum and overpressure properties
- Spiral-free sleeves

Application ranges

High-temperature suction, Suction technology, Plant engineering, Transport of hot and cold air, Gas and steam extraction, , Hot air

Length

Standard length: 2.5 m. According to specifications.

Further informations

Color: black with white cord.

The outer coating does not permit an outside temperature exceeding +280 °C.

TECHNISCHE ANGABEN

| Inner-Ø (mm) | Outer-Ø (mm) | Bending radius (mm) | Pressure (bar) | Vacuum (bar) | Weight (kg/m) | Length (m) | Price (€/m) | Article-No. |
|--------------|--------------|---------------------|----------------|--------------|---------------|------------|-------------|-------------|
| 19 | | | | | | | | |
| 22 | | | | | | | | |
| 25 | | | | | | | | |
| 32 | | | | | | | | |
| 38 | | | | | | | | |
| 41 | | | | | | | | |
| 44 | | | | | | | | |
| 51 | | | | | | | | |
| 57 | | | | | | | | |
| 60 | | | | | | | | |
| 63 | | | | | | | | |
| 65 | | | | | | | | |
| 70 | | | | | | | | |
| 76 | | | | | | | | |
| 80 | | | | | | | | |
| 83 | | | | | | | | |
| 89 | | | | | | | | |
| 95 | | | | | | | | |
| 102 | | | | | | | | |
| 110 | | | | | | | | |
| 114 | | | | | | | | |
| 121 | | | | | | | | |
| 127 | | | | | | | | |
| 140 | | | | | | | | |
| 152 | | | | | | | | |
| 160 | | | | | | | | |
| 165 | | | | | | | | |
| 180 | | | | | | | | |
| 203 | | | | | | | | |
| 229 | | | | | | | | |
| 254 | | | | | | | | |
| 305 | | | | | | | | |

technical information available on request